


SPECIFICATION

Furnish and install roof vent flashing with 25 mil. aluminum base, fitted with elastomer collar. Unit shall be Water-Tite item number checked below as manufactured by IPS Corporation, as per corresponding dimensional characteristics, or equivalent. **(Do not use Petroleum based mastics, sealing compounds, or paints on collar portion of all flashings, on all hardbase, flexible, or rain collars.)**

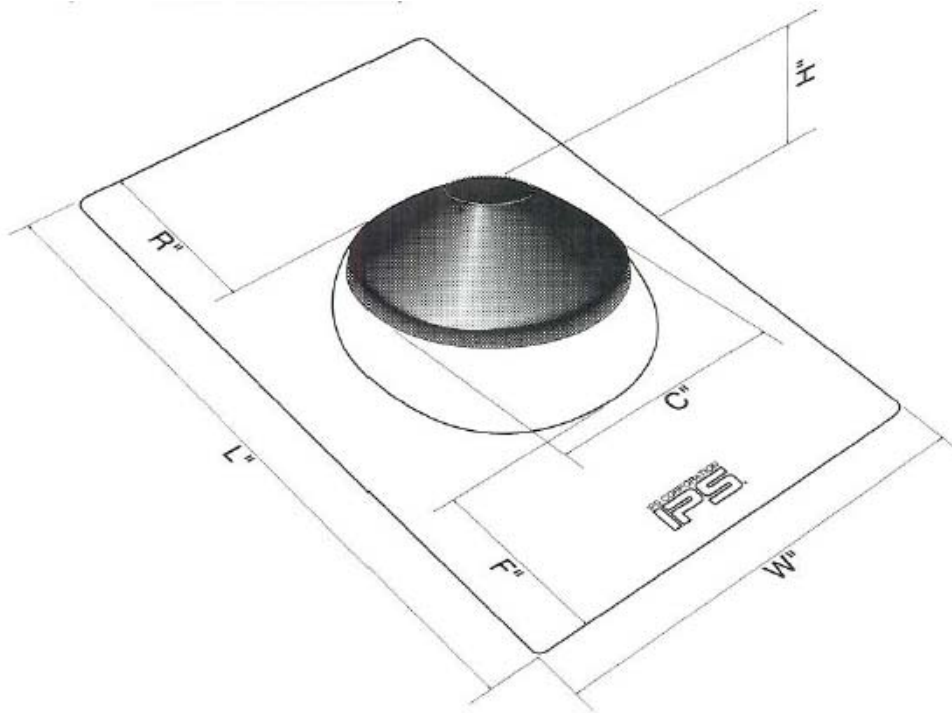

✓ PROD. CODE

| |
|-------|
| 81900 |
| 81905 |
| 81910 |
| 81915 |
| 81920 |
| 81925 |
| 81930 |
| 81935 |

Roof Vent Flashing Dimensional Characteristics

| Model | Vent Size | Dim. W | Dim. L | Dim. R | Dim. F | Dim. C | Dim. H |
|--------|-----------------|---------|---------|--------|--------|--------|--------|
| AB 1 | 1 1/4" - 1 1/2" | 8 3/4" | 12 1/2" | 3 1/2" | 2 3/8" | 4 1/4" | 2 1/4" |
| AB 2 | 2" | 8 3/4" | 12 1/2" | 3 1/2" | 2 3/8" | 4 1/4" | 2 1/4" |
| AB 3 | 3" | 10 3/4" | 14 1/2" | 2 5/8" | 2 3/8" | 5 1/2" | 2" |
| AB 4 | 4" | 12" | 16" | 3 3/4" | 2 3/4" | 6 1/2" | 2 1/8" |
| AB 118 | 1 1/4" - 1 1/2" | 18" | 18" | 6 1/4" | 5 7/8" | 4 1/4" | 2 1/4" |
| AB 218 | 2" | 18" | 18" | 6 1/4" | 5 7/8" | 4 1/4" | 2 1/4" |
| AB 318 | 3" | 18" | 18" | 5 3/8" | 5 1/8" | 5 1/2" | 2" |
| AB 418 | 4" | 18" | 18" | 4 3/4" | 3 3/4" | 6 1/2" | 2 1/8" |