


SPECIFICATION

Furnish and install roof vent flashing with 25 mil. aluminum base, fitted with elastomer collar. Unit shall be Water-Tite item number checked below as manufactured by IPS Corporation, as per corresponding dimensional characteristics, or equivalent. **(Do not use Petroleum based mastics, sealing compounds, or paints on collar portion of all flashings, on all hardbase, flexible, or rain collars.)**

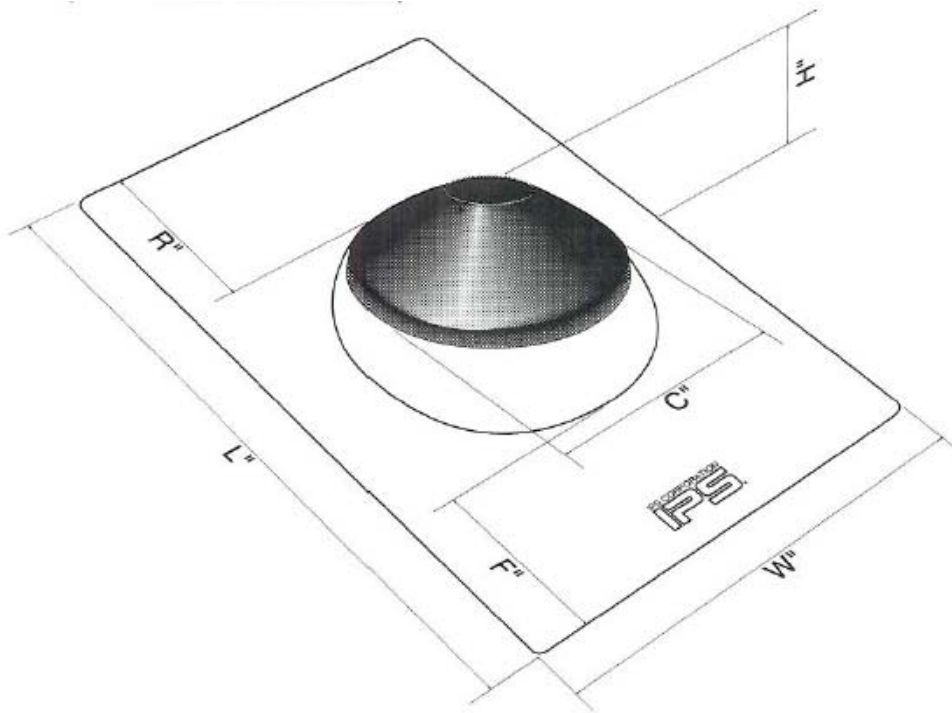

✓ PROD. CODE

81900
81905
81910
81915
81920
81925
81930
81935

Roof Vent Flashing Dimensional Characteristics

Model	Vent Size	Dim. W	Dim. L	Dim. R	Dim. F	Dim. C	Dim. H
AB 1	1 1/4" - 1 1/2"	8 3/4"	12 1/2"	3 1/2"	2 3/8"	4 1/4"	2 1/4"
AB 2	2"	8 3/4"	12 1/2"	3 1/2"	2 3/8"	4 1/4"	2 1/4"
AB 3	3"	10 3/4"	14 1/2"	2 5/8"	2 3/8"	5 1/2"	2"
AB 4	4"	12"	16"	3 3/4"	2 3/4"	6 1/2"	2 1/8"
AB 118	1 1/4" - 1 1/2"	18"	18"	6 1/4"	5 7/8"	4 1/4"	2 1/4"
AB 218	2"	18"	18"	6 1/4"	5 7/8"	4 1/4"	2 1/4"
AB 318	3"	18"	18"	5 3/8"	5 1/8"	5 1/2"	2"
AB 418	4"	18"	18"	4 3/4"	3 3/4"	6 1/2"	2 1/8"